


SPC Male Straight - Stainless Steel Push to Connect Fittings

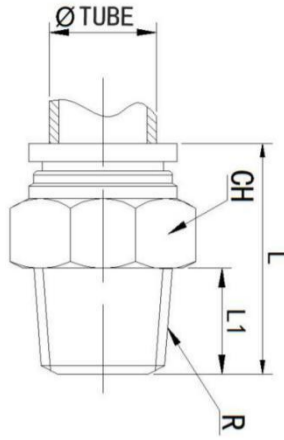

Material: 316 Stainless Steel

Fluid Admitted: Air, Water, Steam, and other liquid

Working Pressure: 0~2.0MPa | 0~290psi

Proof Pressure: 3.0Mpa | 435psi

Negative Pressure: -100Kpa | -29.5 In Hg

Working Temperature: 20~150°C | -4~302°F

Applicable Tube: PU / PA / Teflon Tubing

Seal, O-ring: FKM (Viton)

Metric / Inch Tubing to R, BSPT Thread Male Straight Stainless Steel Push to Connect Fittings

PART NO.	Tube ØD	R	L1(mm)	L(mm)	CH(mm)
SPC 04-M5	4	M5	4	22	11
SPC 04-01	4	R1/8	8	20	11
SPC 04-02	4	R1/4	11	24	14
SPC 04-03	4	R3/8	11	24	17
SPC 04-04	4	R1/2	15	28	22
SPC 06-M5	6	M5	5	24	11
SPC 06-01	6	R1/8	8	23	11
SPC 06-02	6	R1/4	11	23	14
SPC 06-03	6	R3/8	11	23	17
SPC 06-04	6	R1/2	15	28	22
SPC 08-01	8	R1/8	8	25	14
SPC 08-02	8	R1/4	11	24	14
SPC 08-03	8	R3/8	11	24	17
SPC 08-04	8	R1/2	15	28	22
SPC 10-01	10	R1/8	8	28	17
SPC 10-02	10	R1/4	11	30	17
SPC 10-03	10	R3/8	11	24	17
SPC 10-04	10	R1/2	15	28	22
SPC 12-01	12	R1/8	8	28	19
SPC 12-02	12	R1/4	11	30	19
SPC 12-03	12	R3/8	11	28	19
SPC 12-04	12	R1/2	15	28	22
SPC 14-01	14	R1/8	8	28	22
SPC 14-02	14	R1/4	11	31	22
SPC 14-03	14	R3/8	11	28	22
SPC 14-04	14	R1/2	15	28	22
SPC 16-01	16	R1/8	8	28	24
SPC 16-02	16	R1/4	11	32	24
SPC 16-03	16	R3/8	11	32	24
SPC 16-04	16	R1/2	15	32	24

Inch Tubing to R, BSPT Thread Male Straight Stainless Steel Push to Connect Fittings

PART NO.	Tube ØD	R	L1(mm)	L(mm)	CH(mm)
SPC 5/32-M5	5/32"	M5	4	22	11
SPC 5/32-01	5/32"	R1/8	8	20	11
SPC 5/32-02	5/32"	R1/4	11	24	14
SPC 5/32-03	5/32"	R3/8	11	24	17
SPC 5/32-04	5/32"	R1/2	15	28	22
SPC 1/4-M5	1/4"	M5	5	24	11
SPC 1/4-01	1/4"	R1/8	8	23	11
SPC 1/4-02	1/4"	R1/4	11	23	14
SPC 1/4-03	1/4"	R3/8	11	23	17
SPC 1/4-04	1/4"	R1/2	15	28	22
SPC 5/16-01	5/16"	R1/8	8	25	14
SPC 5/16-02	5/16"	R1/4	11	24	14
SPC 5/16-03	5/16"	R3/8	11	24	17
SPC 5/16-04	5/16"	R1/2	15	28	22
SPC 3/8-01	3/8"	R1/8	8	28	17
SPC 3/8-02	3/8"	R1/4	11	30	17
SPC 3/8-03	3/8"	R3/8	11	24	17
SPC 3/8-04	3/8"	R1/2	15	28	22
SPC 1/2-01	1/2"	R1/8	8	28	19
SPC 1/2-02	1/2"	R1/4	11	30	19
SPC 1/2-03	1/2"	R3/8	11	28	19
SPC 1/2-04	1/2"	R1/2	15	28	22

Inch Tubing to NPT Thread Male Straight Stainless Steel Push to Connect Fittings

PART NO.	Tube ØD	R	L1(mm)	L(mm)	CH(mm)
SPC 5/32-U10	5/32"	10-32 UNF	4	22	11
SPC 5/32-N01	5/32"	1/8 NPT	8	20	11
SPC 5/32-N02	5/32"	1/4 NPT	11	24	14
SPC 5/32-N03	5/32"	3/8 NPT	11	24	17
SPC 5/32-N04	5/32"	1/2 NPT	15	28	22
SPC 1/4-U10	1/4"	10-32 UNF	5	24	11
SPC 1/4-N01	1/4"	1/8 NPT	8	23	11
SPC 1/4-N02	1/4"	1/4 NPT	11	23	14
SPC 1/4-N03	1/4"	3/8 NPT	11	23	17
SPC 1/4-N04	1/4"	1/2 NPT	15	28	22
SPC 5/16-N01	5/16"	1/8 NPT	8	25	14
SPC 5/16-N02	5/16"	1/4 NPT	11	24	14
SPC 5/16-N03	5/16"	3/8 NPT	11	24	17
SPC 5/16-N04	5/16"	1/2 NPT	15	28	22
SPC 3/8-N01	3/8"	1/8 NPT	8	28	17
SPC 3/8-N02	3/8"	1/4 NPT	11	30	17
SPC 3/8-N03	3/8"	3/8 NPT	11	24	17
SPC 3/8-N04	3/8"	1/2 NPT	15	28	22
SPC 1/2-N01	1/2"	1/8 NPT	8	28	19
SPC 1/2-N02	1/2"	1/4 NPT	11	30	19
SPC 1/2-N03	1/2"	3/8 NPT	11	28	19
SPC 1/2-N04	1/2"	1/2 NPT	15	28	22

Metric Tubing to NPT Thread Male Straight Stainless Steel Push to Connect Fittings

PART NO.	Tube ØD	R	L1(mm)	L(mm)	CH(mm)
SPC 04-U10	4	10-32 UNF	4	22	11
SPC 04-N01	4	1/8 NPT	8	20	11
SPC 04-N02	4	1/4 NPT	11	24	14
SPC 04-N03	4	3/8 NPT	11	24	17
SPC 04-N04	4	1/2 NPT	15	28	22
SPC 06-U10	6	10-32 UNF	5	24	11
SPC 06-N01	6	1/8 NPT	8	23	11
SPC 06-N02	6	1/4 NPT	11	23	14
SPC 06-N03	6	3/8 NPT	11	23	17
SPC 06-N04	6	1/2 NPT	15	28	22
SPC 08-N01	8	1/8 NPT	8	25	14
SPC 08-N02	8	1/4 NPT	11	24	14
SPC 08-N03	8	3/8 NPT	11	24	17
SPC 08-N04	8	1/2 NPT	15	28	22
SPC 10-N01	10	1/8 NPT	8	28	17
SPC 10-N02	10	1/4 NPT	11	30	17
SPC 10-N03	10	3/8 NPT	11	24	17
SPC 10-N04	10	1/2 NPT	15	28	22
SPC 12-N01	12	1/8 NPT	8	28	19
SPC 12-N02	12	1/4 NPT	11	30	19
SPC 12-N03	12	3/8 NPT	11	28	19
SPC 12-N04	12	1/2 NPT	15	28	22
SPC 14-N01	14	1/8 NPT	8	28	22
SPC 14-N02	14	1/4 NPT	11	31	22
SPC 14-N03	14	3/8 NPT	11	28	22
SPC 14-N04	14	1/2 NPT	15	28	22
SPC 16-N01	16	1/8 NPT	8	28	24
SPC 16-N02	16	1/4 NPT	11	32	24
SPC 16-N03	16	3/8 NPT	11	32	24
SPC 16-N04	16	1/2 NPT	15	32	24